



4100U Addressable c.i.e.

Based on the established power and flexibility of the 4100 Series products, the new 4100U Series offers additional operator, installation and service features, including new hardware and software that provides higher performance and convenient operation, installation and maintenance.

Features

- Easy expansion with addressable loop and collective zone cards
- On-site programmable for a wide variety of applications with upload/download facility
- Supports collective detector inputs and MAPNET and IDNet analogue addressable loops
- 127 devices per MAPNET loop, 250 devices per IDNet loop
- Up to 30 loops per 4100U, 2,000 points in total
- Wide range of addressable devices - detectors, sounder bases, input/output modules, 4-20mA analogue input
- Networkable into large systems (4 networks of 99 panels)
- Network Display Unit configuration available for annunciation and control of up to 12,000 devices for large network systems

General

The SimplexGrinnell 4100U is an analogue addressable fire alarm system that provides extensive and powerful features to satisfy a wide variety of applications and site requirements. On-site programmability allows mapping logic for inputs and outputs, custom labelling, and later revisions. Detector and control point expansion is available up to 2,000 points. For quantities exceeding this, multiple panels can be networked together to form a 4100U network system, with a 4100U configured as a Network Display Unit to provide annunciation and control of up to 12,000 points.

System Overview

Based on the established power and flexibility of the 4100 Series products, the new 4100U Series offers additional operator, installation and service features, including new hardware and software that provides higher performance and convenient operation, installation and maintenance.

Point capacity has doubled to 2,000 points. IDNet (addressable loop) cards support 250 devices, without restrictions on the quantities of point types.

New panel mounted cards & modules are smaller, have enhanced capabilities (including earth fault search) and power limiting. The card firmware is upgraded via download – no more changing EPROMS. Built in diagnostics have been enhanced.

New addressable modules include loop powered 4 input/2 output, input/output with current limited sensing, addressable line isolator, power isolator and multisensor with selectable (patented) detection algorithms. Each module occupies one IDNet address.

New 4100U programming software has additional features including panel upload

& download, import & export panel data with Microsoft Excel, Custom Control wizards, generation of panel label inserts & a checklist that warns when not all programming steps are completed.

Configurable

Starting with a minimal 4100U, consisting of an addressable loop with 250 device capacity, 3 supervised outputs, an ASE interface, power supply & 8 zones of AS 4428 compliant indication & control, the 4100U can be configured as the project's needs change. Increasing the panel's capacity to 500 addressable devices & 32 zones only requires an IDNet card & 3 8 Zone LED/ Switch modules that can all be fitted on site in less than 10 minutes.

Scalable

The 4100U can be configured to be a zone based collective panel or a 2,000 analogue point addressable panel, with up to 30 loops (or combination of conventional zones and addressable loops). Mimic panels, fire fan controls, VESDA & graphics are only a few of the many additions the 4100U can support. All expansion cards & modules can be in a central FIP or distributed around the site in Remote Miniplex Transponder Units (RTU).

For larger or multi-building projects, the 4100U can be networked with up to 99 panels on a network, with a capacity of 50,000 points per network.

Compatible


Backwards compatibility has always been a feature of all Simplex panels. Even a 20 year old Simplex 2120 can be interfaced with the 4100U, using factory tested & documented procedures. Existing 4100 panels can be upgraded to 4100U point & processing capabilities & still use the old 4100 expansion cards in the existing cabinet. The 4100U is compatible with all existing 4120 networks.

Connectable


The trend towards computer based building services has exploded & the 4100U can communicate with most systems, including VESDA.net, BACnet, Intranet/Internet (with panel generated emailing of alarms, faults & isolations), GPS based time & date, Interface to QE90 EWIS, most makes of BMS, PC Annunciator (with LAN support). Due to the worldwide popularity of the 4100U, applications interfacing information is widely available, from Simplex, third party equipment makers & the internet.

Features

- Easy expansion with addressable loop and conventional zone cards
- On-site programmable for a wide variety of applications
- Supports on-site upload & download of panel program
- Supports conventional detector inputs and MAPNET and IDNet analogue addressable loops
- 127 devices per MAPNET loop, 250 devices per IDNet loop
- Up to 30 loops per 4100U, 2,000 points in total
- Wide range of addressable devices - detectors, sounder bases, input/output modules, 4-20mA analogue input
- AS 1668 Fan Control module (4 fans) with rotary switches and fan status LEDs
- 9A System Power Supply (SPS) modules includes built-in IDNet analogue loop driver
- Remote MINIPLEX Transponders and serial annunciators
- Networkable into large systems (4 networks of 99 panels)
- Dial-in service modem (option)
- RS232 interfaces for PC annunciators and remote printers
- Panel mount printer (option)
- Four operator access levels
- 1200 event historical log (separate alarm/fault logs)
- Walk test and individual point disconnect/disable
- Programmable alarm verification, output logic control, alarm thresholds, network operation and annunciation
- SafeLinc Internet Interface Card available for remote access via client LAN
- High level links to EWIS, BMS and BACnet
- 19" rack compatible cabinet range - 18U, 21U, 28U & 40U cabinet configuration

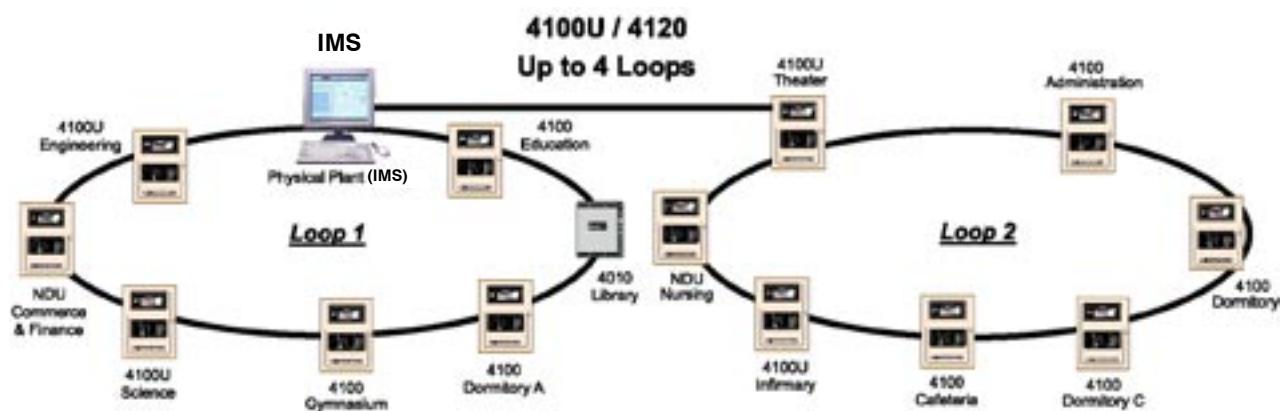

4100/4120 Network Multi-Loop Expansion

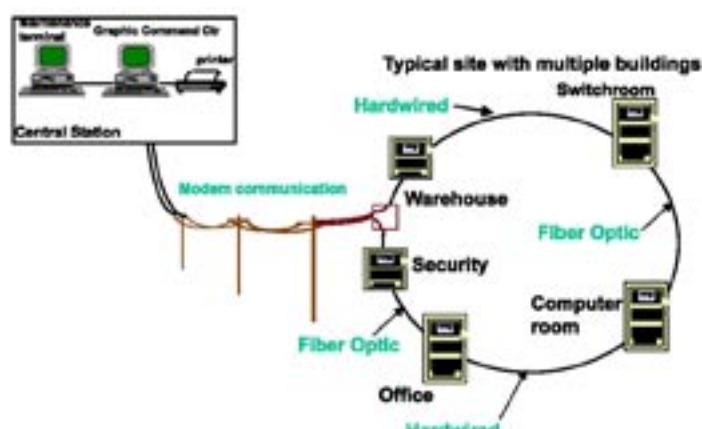

Flexible Network Communications

- Communicates Information along remote Fire Alarm Control Panel locations (defined as Network Nodes)
- Initiates Alarm Silence, Acknowledge and Reset
- Displays status of selected circuit points, point lists and network nodes
- Investigates specific point status details
- Declares system alarm from Control Panels

Network Nodes include:-

- 4100 series Fire Alarm Control Panels
- 4120 series Network Processing Units (NDU), Network Display Units (2500NDU) and MINIPLEX® and Universal Transponders (UT)
- 4190 series Information Management Systems (IMS)
- Retrofit into existing 4100 and 2120 systems

- TrueAlarm Sensor Operation:-
 - Read status of TrueAlarm Analogue detection sensors at multiple locations
 - Remote or local sensitivity selection
- Style 7 wired communications:-
 - Single wire pair between nodes
 - Up to 5km between nodes with 1.00mm² twisted shielded wire
- Optional Fibre Optics communications
- Full Network communication supervision:-
 - Network level diagnostics
 - LED Status indications on interface board
- Set host function accesses remote node data
- Remote dial-in modem for off-site data access

Specifications

System Capacity

Panel Capacity 2,000 points of Addressable input / output devices or collective zones.
Networked System Capacity 99 networked panels (2,000 points/ panel)

Mechanical

Cabinet Size(mm) Dependant on system configuration
Cabinet Material 1.5mm mild steel
Cabinet Finish Powder coated
Cabinet Colour Magnolia Ripple
Mounting Wall mount
Mains Input 240V AC, +6%,-10%,50/60Hz

Electrical

Mains Supply 28.5V DC @ 12A
Standby Battery 24V sealed lead acid up to 50Ah
Battery Charger 28.5V DC (nominal) @ 4A,
Charger high/low,Battery low/fail

Environmental

Temperature -5°C to +45°C
Humidity 10% to 90% RH (non-condensing)

Expansion Modules

Maximum Number	119 modules
4100 - 5002/5004	Collective zone module; 8 zone circuits/module; Supports standard 20V detectors plus normally open contact devices
4100 - 3003	8 Point Auxiliary Relay Module; 8 CPU controlled auxiliary relays/module SPDT contacts rated for 3 amps @ 24VDC or 30VAC
4100 - 4322	6 Circuit Supervised Signal Module; 6 Style Y (class B) circuits per module
4100 - 0113	RS-232/2120 Communications Module; Provides two RS-232-C outputs for remote printers and/or CRT; 5x RS-232-C ports max. per 4100 system; Can be configured for communication with a host 2120 system; Can be configured as a Computer Port for communications to a remote system ie BMS or BAS Systems
4100 - 6011	4120 Network Interface Module; RS485 Communications; Optional Fibre Optics Media Card
4100 - 0110	MAPNET® TRUEALARM™ Addressable Loop Module; Up to 127 MAPNET Addressable devices or TrueAlarm Analogue Sensors; Up to 10 Mapnet Loop Cards per system; Supports Mapnet Short Circuit Line Isolator Modules
4100 - 3101	IDNet Addressable Loop Module; Up to 250 IDNet Addressable devices or TrueAlarm Analogue Sensors; Up to 30 IDNet cards per 4100U system
4100 - 0304	Remote Unit Interface Module; Provides a supervised serial communications channel to remotely located distributed Miniplex® Transponders and LCD Annunciators; Up to 32 distributed Miniplex® Transponders and/or LCD Annunciators per 4100 system
4100 - 3020	24 Relay Input/Output Relay Motherboard; 24 CPU controlled relays; Each of the 24 relays can be individually configured as either an input or an output SPST contacts rated for 0.5A @ 24VDC or 30VAC
4100 - 0301	64/64 LED / SWITCH Controller Interfaces up to 64 LEDs and 64 switches to the master controller for front panel annunciation
Zone Status LED Status Indicators	2 line by 40 character backlight LCD with adjustable contrast control Common Alarm, Fault and Isolate External Bell Isolated, Warning System Isolated, Mains Power ON
Audible Buzzers (2 sounders)	Panel sounder for Alarm, Fault, Isolate Conditions, CPU Piezo for keypad feedback
Keypad Controls	
Firefighter Facility (7 keys)	Ext. Bell & Warning System Isolate, Ack, System Reset, Isolate, Previous, Next
Keypad Control Keys (5 keys)	with programmable functions & labels for marking the function of each key
Service Keys	Any of the 5 sets of keys that are accessible only when the front access door of the Front Panel Display is lowered. These include the Function Keys, the Display Keys, the Action Keys, the Fault/Isolate Keys, and the Entry Keys.
Software Features	<ul style="list-style-type: none"> • WALK TEST System Test • 4 Operator Access Levels • 1200 Event Historical Logging (separate alarm/fault logs) • Zone selectable Alarm Verification • Individual Circuit Disconnect / Disable • Nonvolatile Flash EPROM for field editable program changes • AS 4428 Compliance

The Simplex® 4100U Fire Detection and Alarm Platform is a high-end, next-generation distributed network system that combines superior fire protection and information management with lower costs of installation, maintenance and ownership. Designed to meet the needs of engineers, facility managers, building owners and electrical contractors, the 4100U builds upon the field-proven performance of the industry-leading Simplex 4100 Series fire systems. The 4100U adds new technology, expanded point capacity, digital voice communications, advanced built-in diagnostics, dual operating software, and other enhancements. Moreover, it has been specifically designed to allow existing 4100 and 4120 network systems to be upgraded rather than replaced.

Capable of supporting 392,000 addressable analog points, the 4100U platform links multiple 4100U control panels in a seamless, highly survivable fire alarm network. Its advanced peer-to-peer, token ring network provides a communications platform for master annunciation, control and information sharing that does not require centralized processing. This ensures unparalleled survivability compared to conventional systems that rely on central control. The system offers true interactive, two-way communications between the 4100U control panels, TrueAlarm® smoke detectors and TrueAlert™ notification appliances, with intelligent communications extending all the way to each individual point on the system for total addressability.

Approved

The 4100U is certified to Australian Standard AS 4428.1- 1998:
"Fire detection, warning, control and intercom systems - Control and Indicating Equipment, Part 1: Fire".

SSL ActivFire Listing Number afp-1682.



tel: 1300 552 559

www.simplexfire.com.au

firesafety.au@tycoint.com

Tyco reserve the right to alter specifications without notice in line with their policy of continuous product improvement.

A **tyco** COMPANY